


# FallSafe™

WSA01

CE

**EN 795 : 2012 Type B**  
**ANSI Z 359.1:2007**

**One D-Ring &  
One Textile Loop**

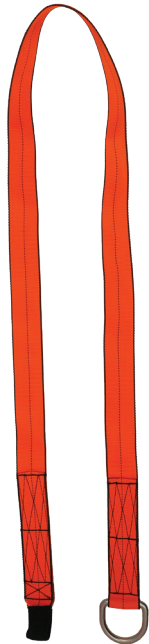

**Double D-Ring**



A Web Sling Anchorage is a type of anchorage device used in fall protection systems. It typically consists of a strong, flat webbing material with a loop or D-ring at one or both ends. The anchor is used to secure lifelines, lanyards, or other fall arrest equipment to a solid structure, providing a reliable point of attachment for workers at height.

We provides a wide range of anchorage web sling of various configurations and lengths that can be altered in length as per requirement.

## Product Specification

Webbing Material	44 mm Polyester
Color of Webbing	Orange
Length Configuartion	1m, 1.5m and 2m or as requested
Attachment Configuartion	D- Ring at one end and Textile Loop at other end D- Ring at both ends
Minimum Braking Strength	18 KN for 3 Minute
Confirms to	EN 795:2012 Type B & ANSI Z359.1:2007

## Application

- Construction Sites
- Work at Height

## SKU Information

Product SKU	Inner pack UPC	Carton GTIN
BLSH-FP-WSA01	XXXXXXXX	XXXXXXXX

